


## Labelling Positions


**SAS 1**  
Fig. 1

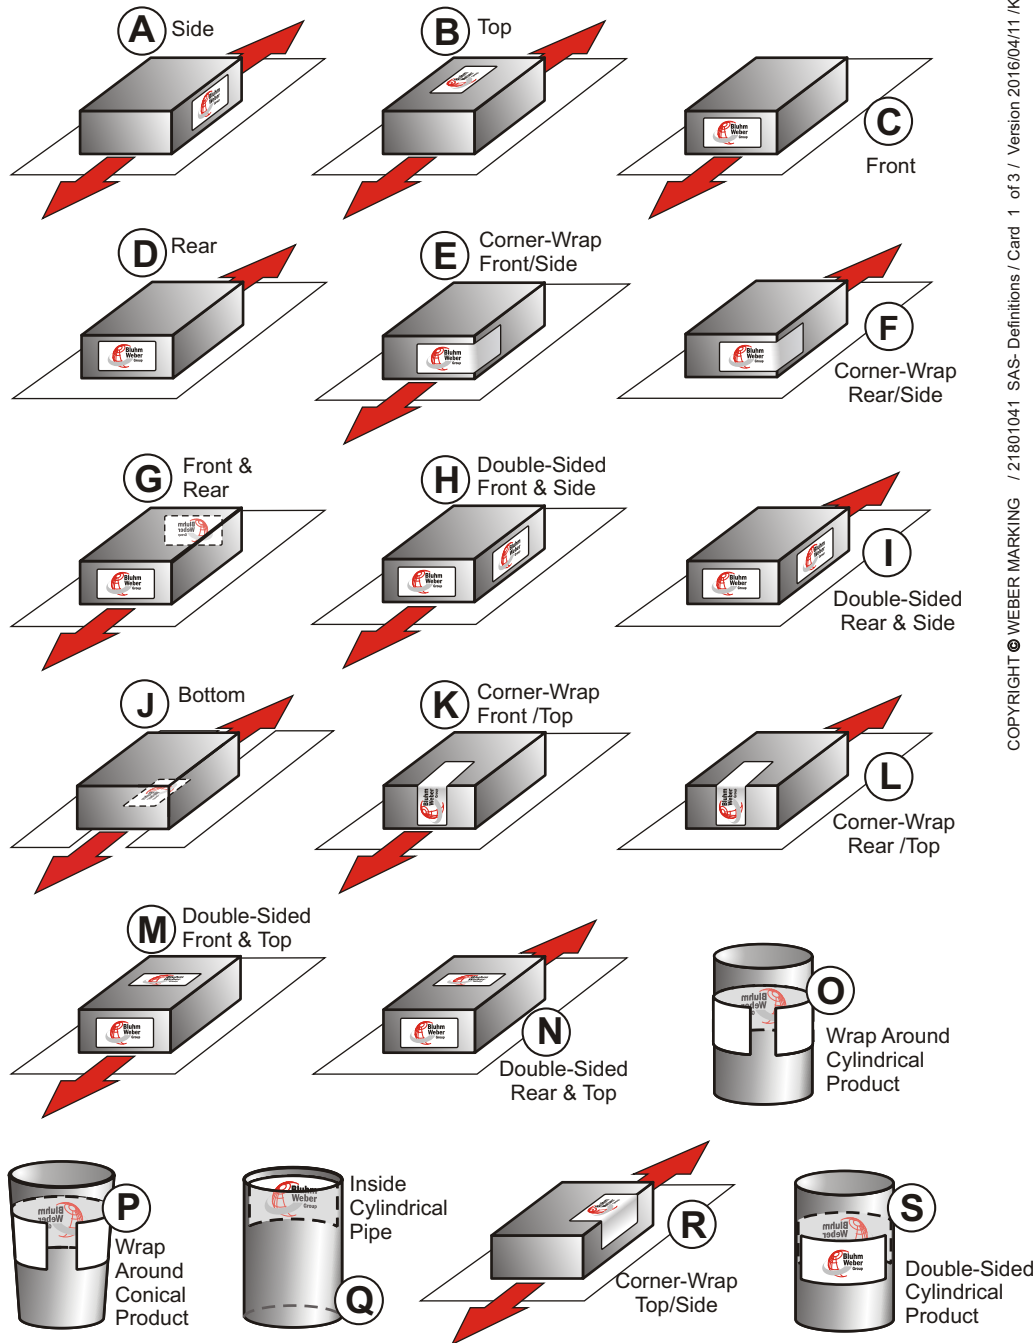


**SAS 2**  
Fig. 2

## Conveyer Details:

VIEW AT LEFT SIDE:

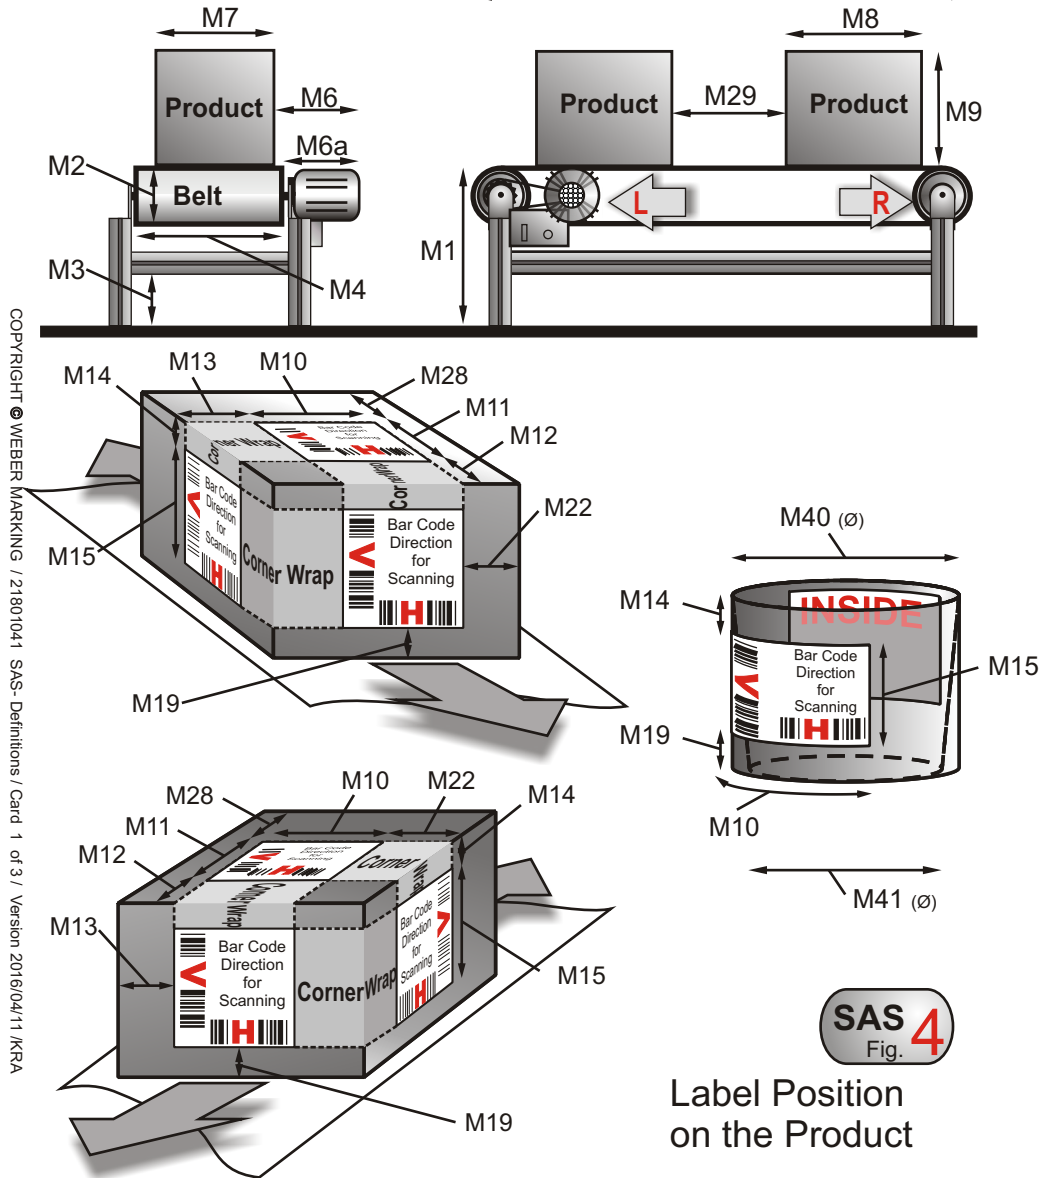


## Illustration: Legi-Air (RH) Right-Hand Versions

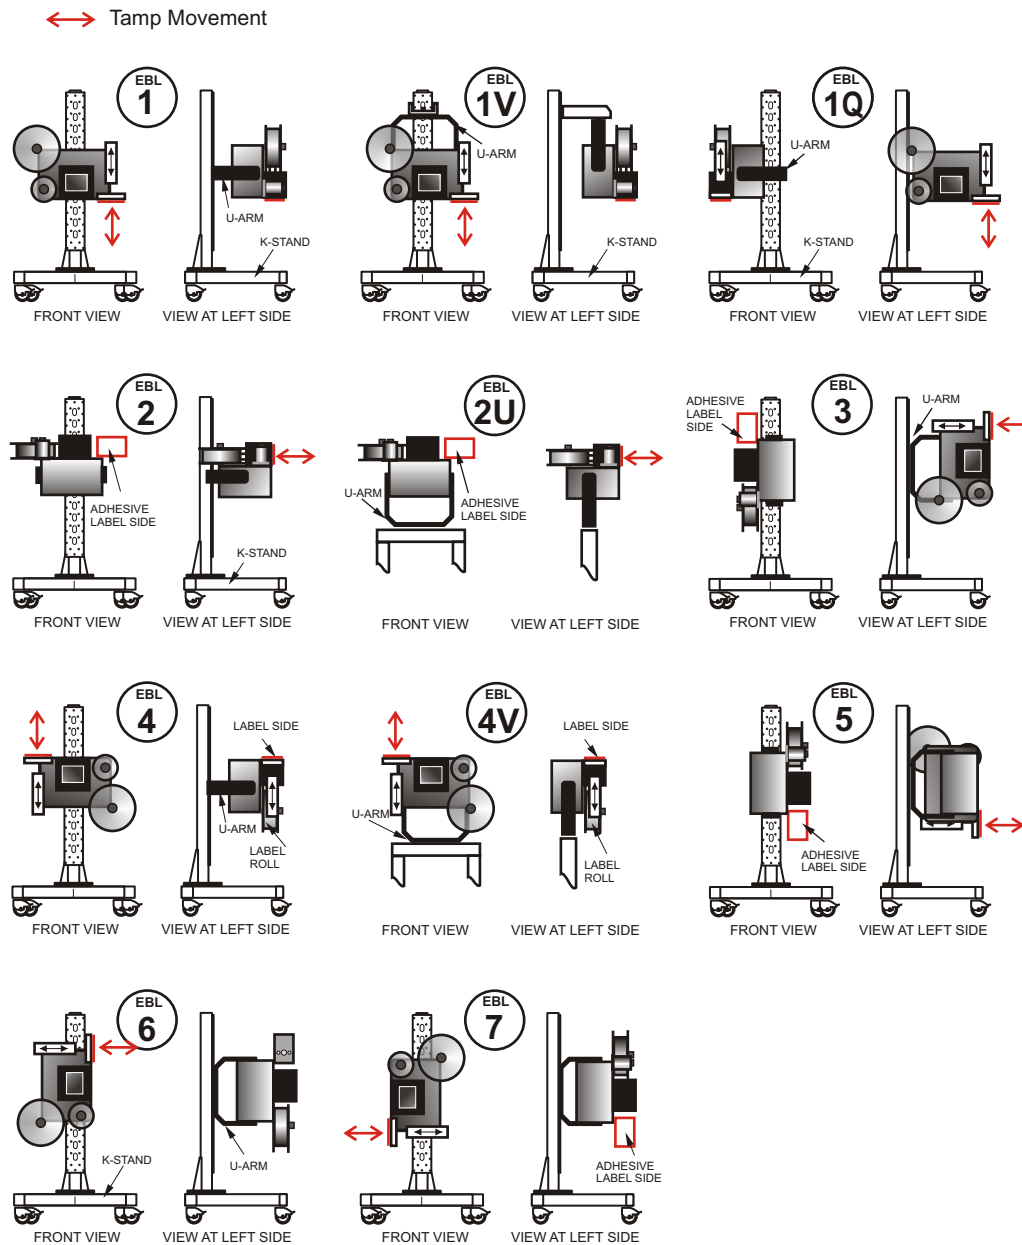


COPYRIGHT © WEBER MARKING / 21801041 SAS-Definitions / Card 2 of 3 / Version 2016/04/11 /KRA

The Right-Hand (RH) pallet labeler with swing arm in a "NOSE UP" orientation (= label roll "DOWN") delivers the same abilities as the Left-Hand (LH) pallet labeler with swing arm in "NOSE DOWN" orientation (= label roll "UP").

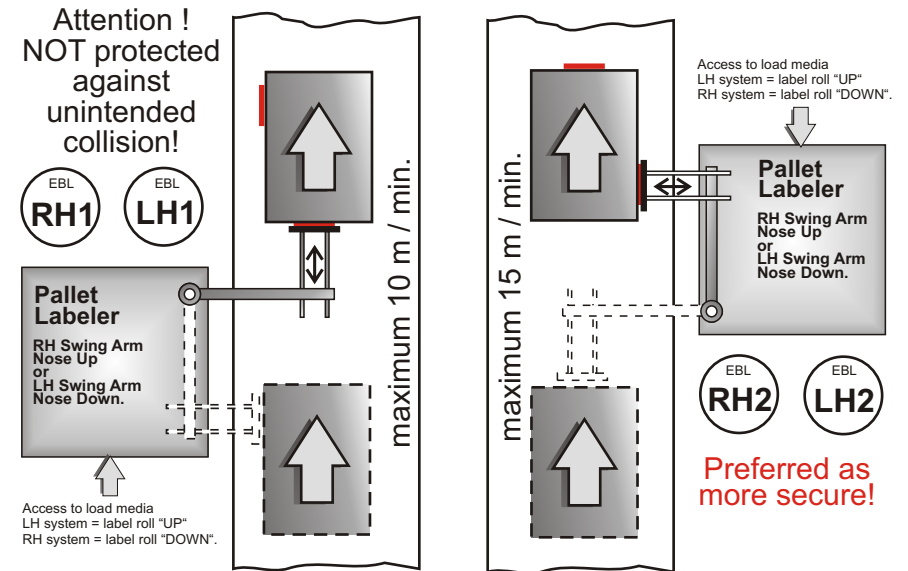


The Left-Hand (LH) pallet labeler with swing arm in a "NOSE UP" orientation (= label roll "DOWN") delivers the same abilities as the Right-Hand (RH) pallet labeler with swing arm in "NOSE DOWN" orientation (= label roll "UP"). LH/RH 3 + 4 corresponds to the guidelines of the GS1.

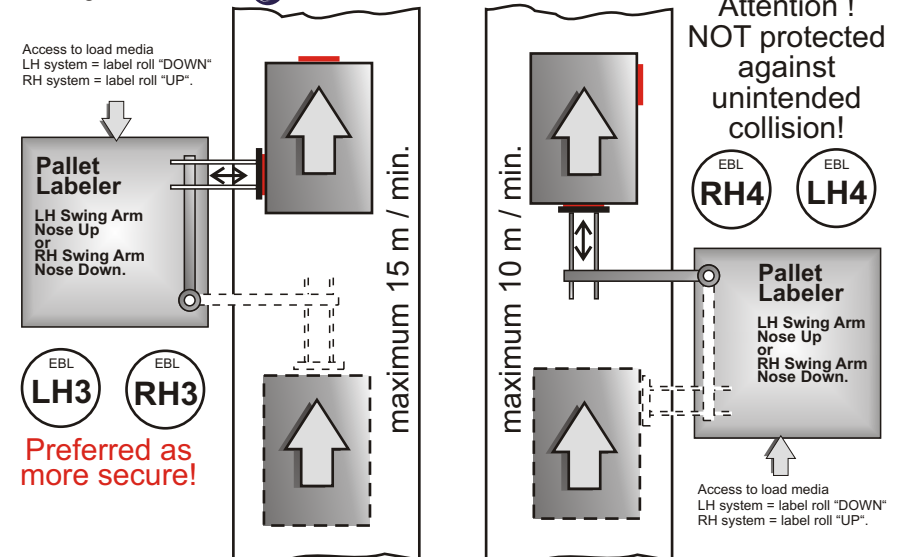

COPYRIGHT © WEBER MARKING / 21801041 SAS-Definitions / Card 2 of 3 / Version 2016/04/11 /KRA



## Illustration: Legi-Air (LH) Left-Hand Versions

↔ Tamp Movement

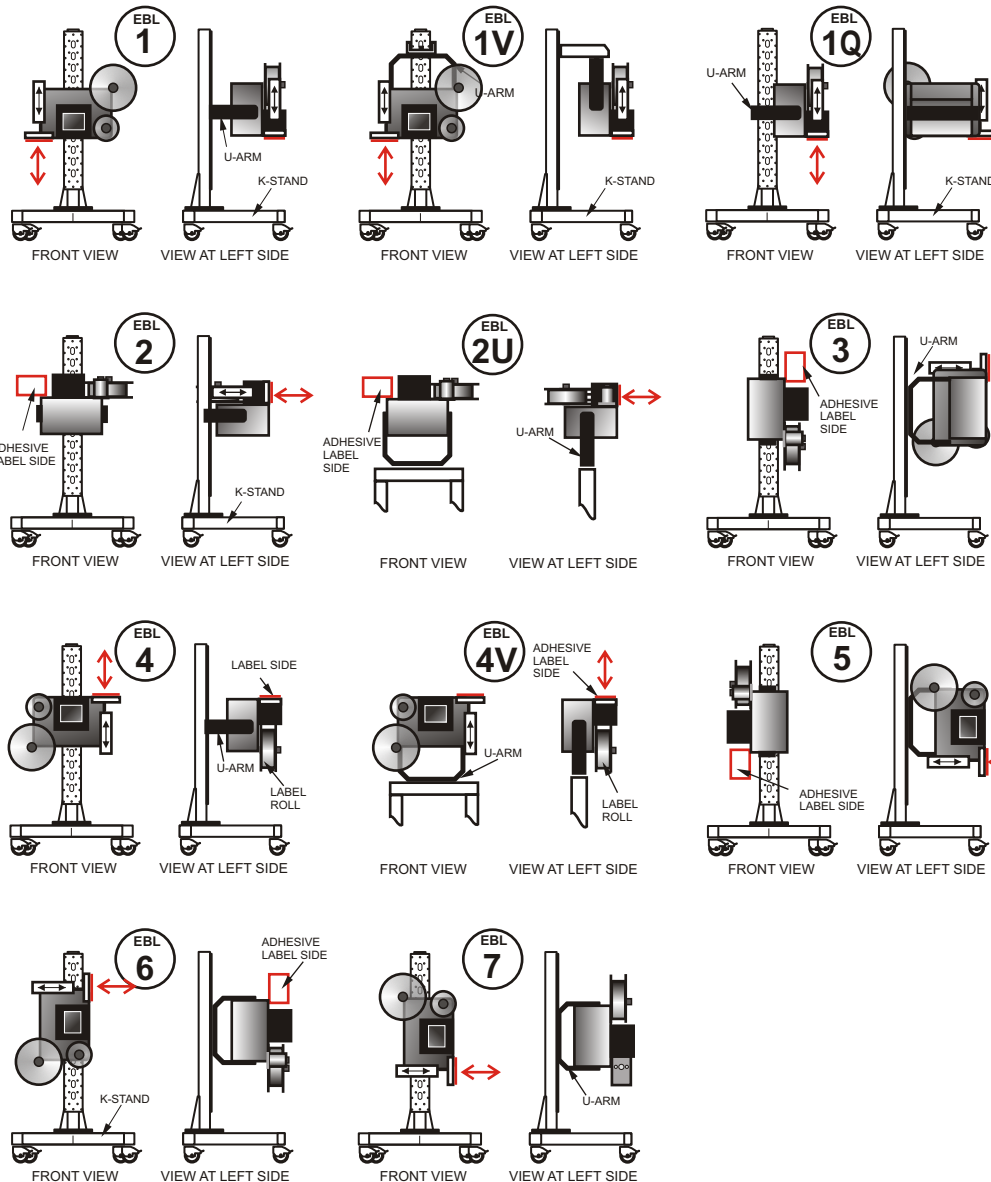

COPYRIGHT © WEBER MARKING / 21801041 SAS-Definitions / Card 3 of 3 / Version 2016/04/11 /KRA

Dimensions for Label Sizes: **Label Width x Label Height (W x H)**

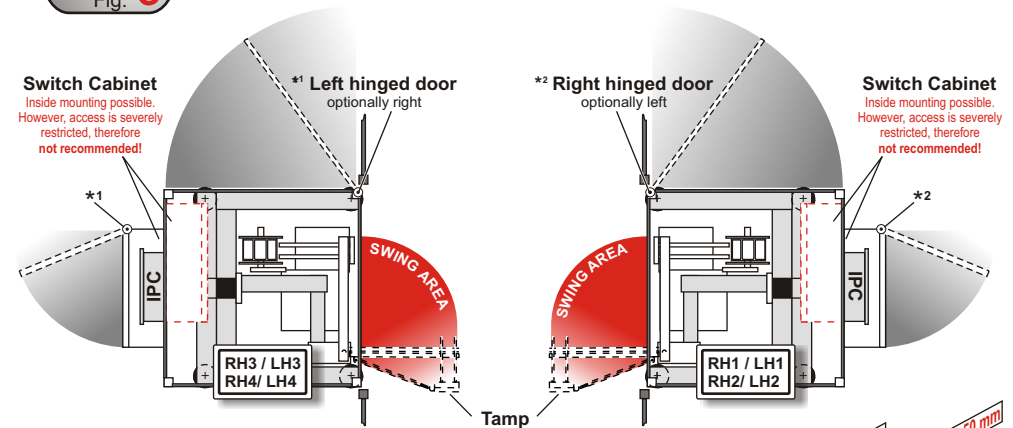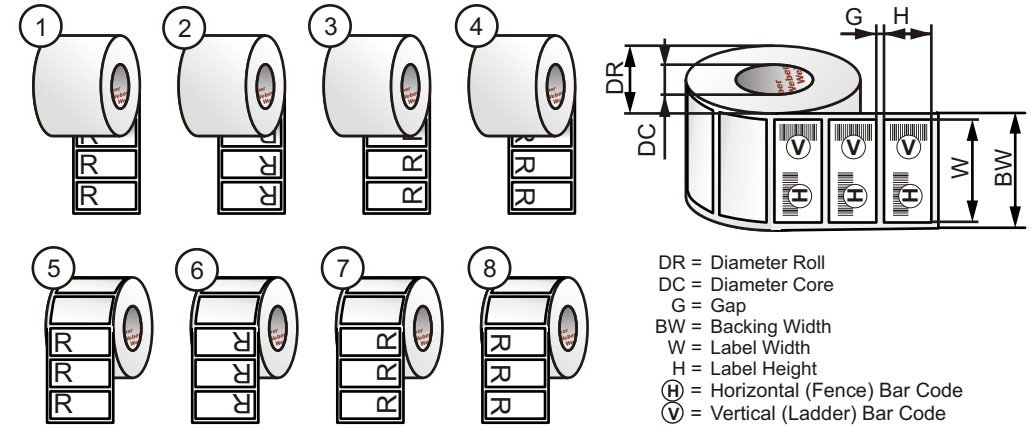

Guidelines of Positioning with EAN 128 Standard for pallet labels as recommended by GS1

